


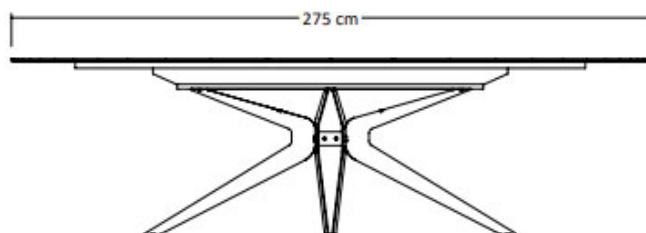



## DINING TABLES




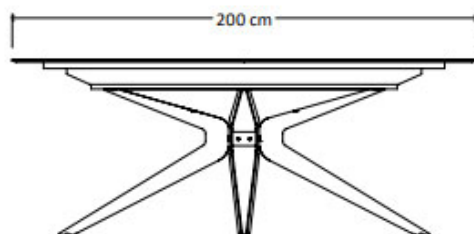


<b>Top</b>	10mm thick, CDF High density wood fibreboard covered with low-pressure laminate (LPL) Gold Marble matt color finish
<b>Legs</b>	Iron, matt Anthracite color finish
<b>Hardware</b>	Metal

### Cleaning:

- Please use a damp cloth and mild liquid detergent.
- Do not use abrasive sponges that can flatten the surfaces. Please use a soft cloth.
- Do not use powder detergent or abrasive products, bleach or highly chlorinated substances, acids and strong bases

### SIDEBOARD, ENTERTAINMENT UNIT

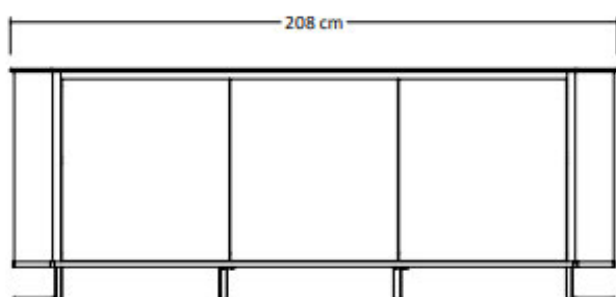
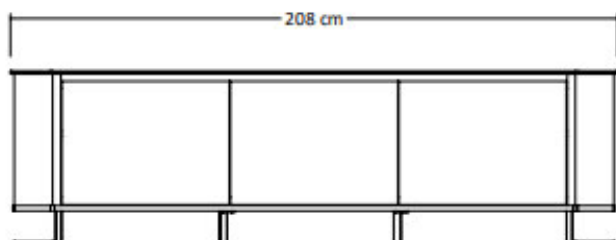


<b>Top</b>	<ul style="list-style-type: none"> <li>• 10mm thick, CDF High density wood fibreboard covered with low-pressure laminate (LPL) Gold Marble matt color finish</li> <li>• Inner top: 28mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> </ul>
<b>Bottom</b>	<ul style="list-style-type: none"> <li>• 18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> <li>• Inner bottom: 28mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> </ul>
<b>Side panels</b>	<ul style="list-style-type: none"> <li>• 18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Honey Ribbed matt wood color finish. Folding system. 1mm thick, ABS edges</li> <li>• Inner side panels: 18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> </ul>
<b>Inner division</b>	18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges
<b>Wood shelves</b>	18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges
<b>Door</b>	18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Honey Ribbed matt wood color finish. 1mm thick, ABS edges
<b>Back panel</b>	4mm thick, double-sided laminated MDF
<b>Hinges</b>	Metal, soft closing mechanism
<b>Feet</b>	Iron, matt Anthracite color finish. H.110mm

#### Cleaning:

- Please use a damp cloth and mild liquid detergent.
- Do not use abrasive sponges that can flatten the surfaces. Please use a soft cloth.
- Do not use powder detergent or abrasive products, bleach or highly chlorinated substances, acids and strong bases


## MIRROR

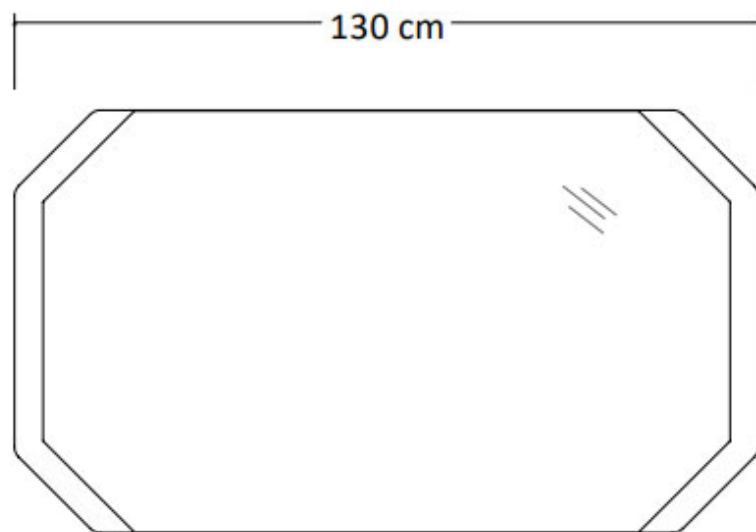

<b>Panel</b>	18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Honey Ribbed matt wood color finish. 1mm thick, ABS edges
<b>Mirror</b>	3mm thick



### CABINET

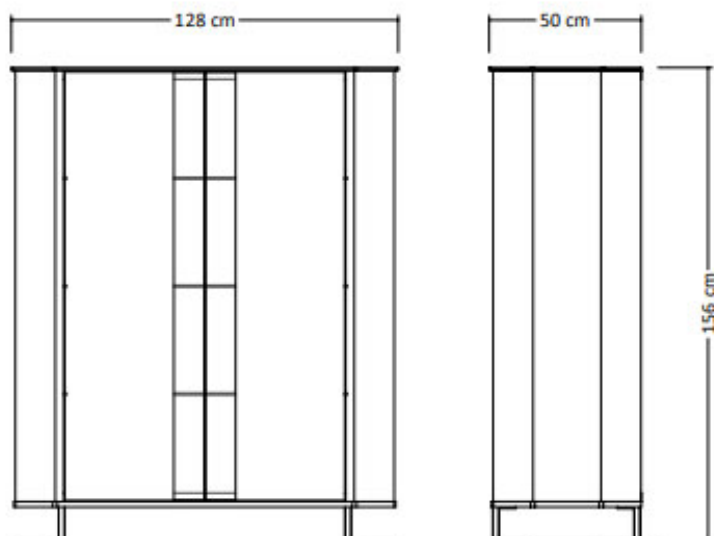

<b>Top</b>	<ul style="list-style-type: none"> <li>• 10mm thick, CDF High density wood fibreboard covered with low-pressure laminate (LPL) Gold Marble matt color finish</li> <li>• Inner top: 28mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> </ul>
<b>Bottom</b>	<ul style="list-style-type: none"> <li>• 18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> <li>• Inner bottom: 28mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> </ul>
<b>Side panels</b>	<ul style="list-style-type: none"> <li>• 18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Honey Ribbed matt wood color finish. Folding system. 1mm thick, ABS edges</li> <li>• Inner side panels: 18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Anthracite color finish. 1mm thick, ABS edges</li> </ul>
<b>Glass shelves</b>	6mm thick, tempered glass
<b>Door</b>	<ul style="list-style-type: none"> <li>• Wood-door: 18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Honey Ribbed matt wood color finish. 1mm thick, ABS edges</li> <li>• Frosted/Transparent Glass-door: 4mm thick, tempered glass</li> </ul>
<b>Back panel</b>	18mm thick, engineered wood panel covered with low-pressure laminate (LPL) Honey Ribbed matt wood color finish. Folding system. 1mm thick, ABS edges
<b>Hinges</b>	Metal, soft closing mechanism
<b>Feet</b>	Iron, matt Anthracite color finish. H.110mm
<b>LED Lights</b>	Light color: 3000K

#### Cleaning:

- Please use a damp cloth and mild liquid detergent.
- Do not use abrasive sponges that can flatten the surfaces. Please use a soft cloth.
- Do not use powder detergent or abrasive products, bleach or highly chlorinated substances, acids and strong bases

# CHAIR




<b>Legs</b>	Solid Beech Wood. Anthracite color finish, matt polyurethane varnish
<b>Upholstery</b>	Fire resistant fabric and foam. Color reference: Norris 03 (Sand) eco-leather

## Cleaning:

- ***Please use a damp cloth and mild liquid detergent.***
- ***Do not use abrasive sponges that can flatten the surfaces. Please use a soft cloth.***
- ***Do not use powder detergent or abrasive products, bleach or highly chlorinated substances, acids and strong bases***

5.

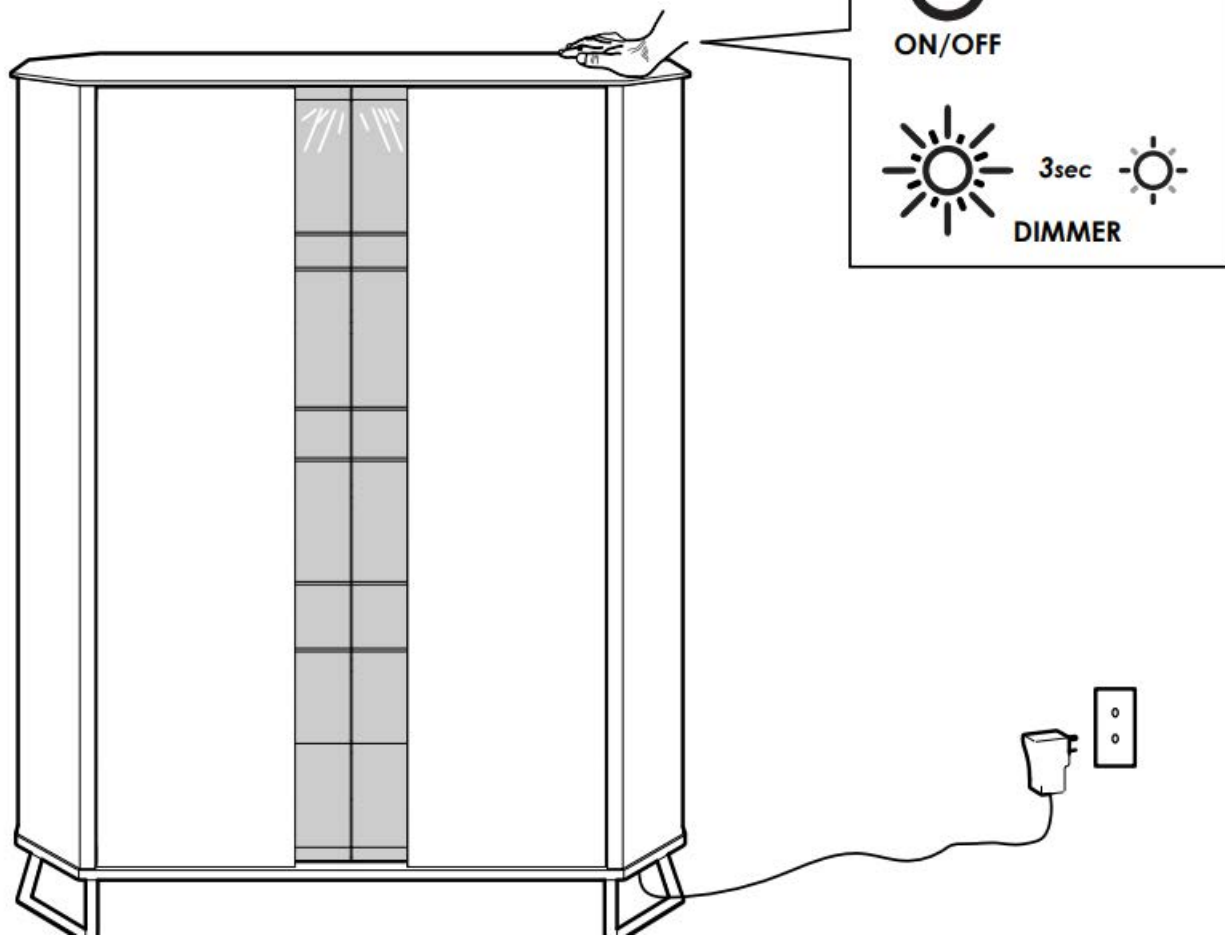



**CDF** is  
ecofriendly

**STATUS**  
Italian status symbol



**EN CDF** is environmentally friendly

- Made from Swiss wood that originates from sustainably managed forrests
- 90 % renewable energies are used during its production
- **CDF** completely integrates into cascade use of the wood cycle and is biodegradable
- Saves CO<sub>2</sub> and protects the environment

**FR CDF** respecte l'environnement

- Fait de bois suisse issu de forêts à gestion durable
- Lors de la production, plus de 90 % de ressources énergétiques renouvelables sont utilisés
- **CDF** s'intègre parfaitement à l'utilisation en cascade du cycle du bois
- Stock le CO<sub>2</sub> et protège l'environnement

**IT CDF** è ecologico


- Prodotto con legno svizzero proveniente da foreste gestite in base a criteri di sostenibilità ambientale
- Durante la produzione viene impiegato oltre il 90 % di risorse energetiche rinnovabili
- **CDF** si inserisce interamente nell'utilizzo a cascata del ciclo di vita del legno
- Risparmia CO<sub>2</sub> e rispetta l'ambiente

**STATUS**  
Italian status symbol

# A new material for new designs

CDF


High density wood fibreboard (>1,000 kg/m³)

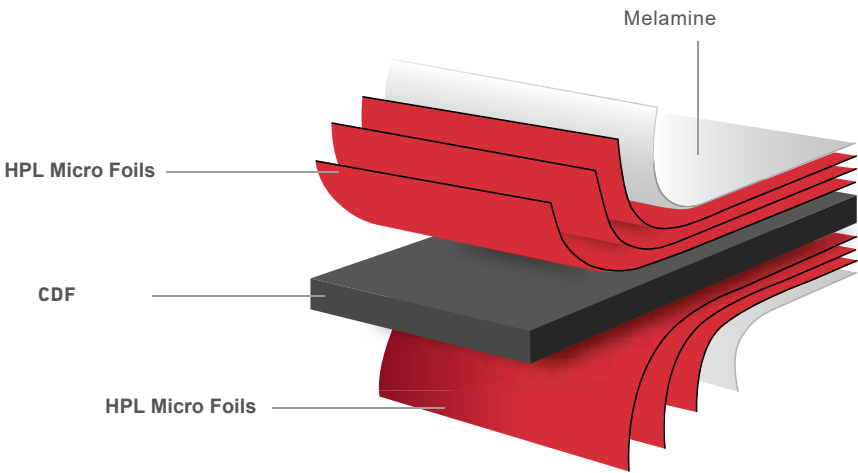


Low swelling



Low flammability



Processing friendly




Low emissions




Hygienic



Scratch resistant



Shock resistant



Easy care



Environmentally friendly

LAMINATED BOARD CDF (acc. to EN 14322: Melamine-coated boards for indoor applications)

Testing Parameter	Ref	Unit	Standard
Abrasion resistance	3A	Class [1-4]	EN 14322
Scratch-resistance behaviour	3.5	N	EN 14322
Susceptibility to cracking	5	Class [1-5]	EN 14322
Shock resistance (large steel ball)	1'000	mm	EN 14322
Behaviour when exposed to steam	4	Level [1-5]	EN 14322
Colour / surface consistence	4	Level [1-5]	EN 14322
Resistance to staining	4	Level [1-5]	EN 14322
Light fastness	>4	Level	EN 14322
Edgeband swelling	<7	%	EN 13329
Formaldehyde emission	<0.4	mg/(m²h)	EN 717-2
Fire classification	C-s2,d0 flame-retardant (limited smoke development, no dripping)		EN 13501-1
Tolerances	Thickness +0.5/-0.3 mm Length x width at 2.80 x 2.07 m ±5.0 mm, for cut shapes ±2.5 mm Edge chipping at 2.80 x 2.07 m ≤10 mm, for cut shapes ≤3 mm Surface defect: Spots ≤2 mm²/m², longitudinal defects ≤20 mm/m		EN 14322
Ecology information	Renewable energy > 90 %   wood fibre 65-75 %   MUF adhesive 20-30 %   Swiss wood   does not contain old-forest   no chlorides no biocides in the wood   no heavy metals in the coating biologically/ thermally recyclable		SIA 493.05



**CDF is a structural and resistant material.  
Its density is double that of  
MDF (>1,000 kg/m<sup>3</sup>).**

**The panel edge color is  
black, as is the panel's core,  
allowing for a variety of  
applications and designs.**